



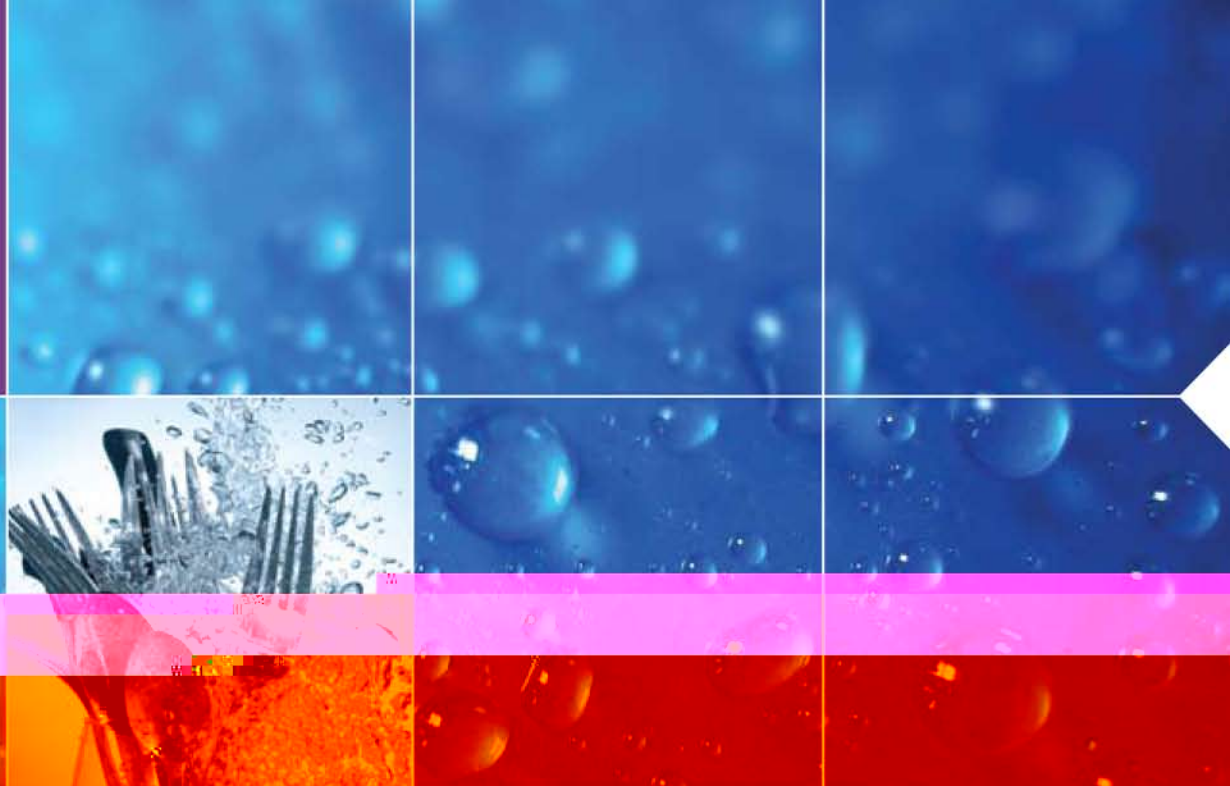

Performa™ Cv Control Valves

Choose from a wide range of Performa Cv control valves to suit your application. Visit our website www.valvesupply.com for more information and general enquiries.

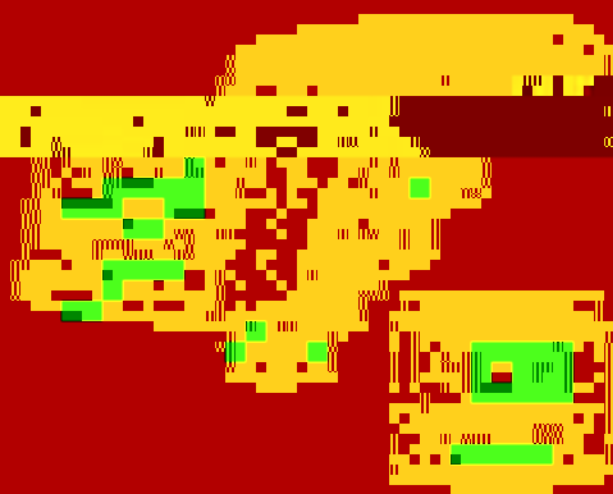

Performa Cv control valves are available in a range of sizes and materials to suit your application. They are designed to provide reliable and accurate flow control in a wide range of industrial and commercial applications. For more information, visit our website www.valvesupply.com.

Performa Cv control valves are available in a range of sizes and materials to suit your application. They are designed to provide reliable and accurate flow control in a wide range of industrial and commercial applications. For more information, visit our website www.valvesupply.com.

Key Features

- Available in a range of sizes and materials to suit your application.
- Designed to provide reliable and accurate flow control in a wide range of industrial and commercial applications.
- For more information, visit our website www.valvesupply.com.

- Available in a range of sizes and materials to suit your application.
- Designed to provide reliable and accurate flow control in a wide range of industrial and commercial applications.
- For more information, visit our website www.valvesupply.com.

Key Features

- Available in a range of sizes and materials to suit your application.
- Designed to provide reliable and accurate flow control in a wide range of industrial and commercial applications.
- For more information, visit our website www.valvesupply.com.






Dimensions

Valve Connections

Tank Thread	2-1/2-inches – 8, male
Inlet/Outlet Threads	1-3/4-inches – 12 UNC-2A male
Drain Line	3/4-inch NPT, male
Brine Line	3/8-inch NPT, male
Distributor Tube Diameter	1.050 inches (27 mm)
Distributor Tube Length	1/2 ± 1/2-inches (13 ± 13 mm) above top of tank

Outline Dimensions

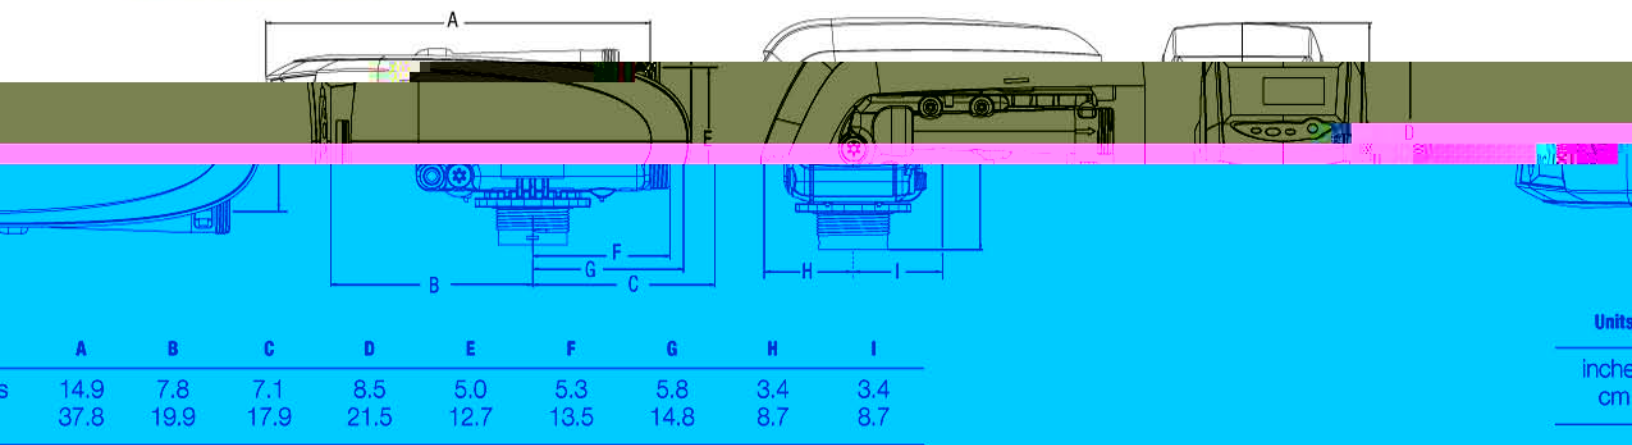

only)	
r) drop	25.0 gpm (5.7 m³/h)
bar) drop	20.0 gpm (4.5 m³/h)
	Cv = 6.50 (Kv = 5.6)
	Cv = 4.00 (Kv = 3.5)

oller Flow Rate Characteristics

Backwash Flow Control Table

Performance


Flow Rates (Valve O
Service @ 15 psi (1.03 bar)
Backwash @ 25 psi (1.72 bar)
Service
Backwash

Logix™ Series Contr


Injector* Performance

Logix™ Series Controllers

Injector "H" (Light Purple)
For 9-inch Tanks





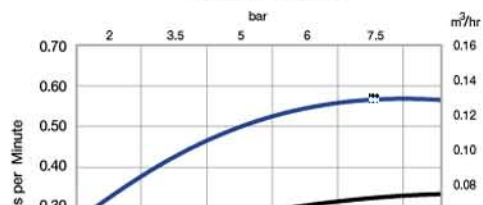


Injector "J" (Light Blue)
For 10-inch Tanks

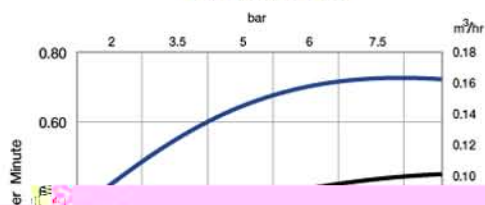

100%

200%

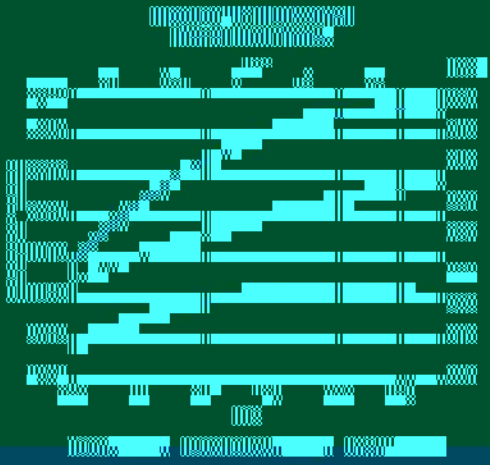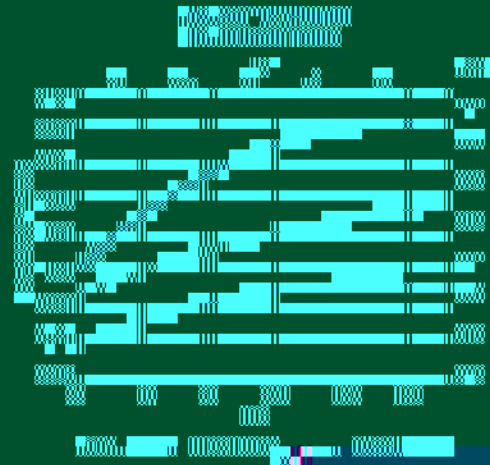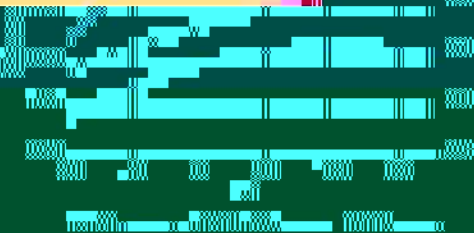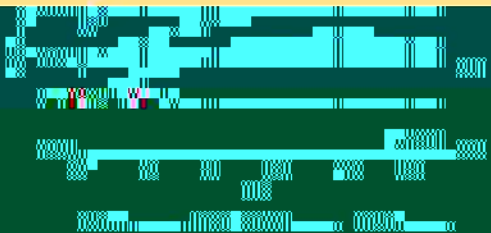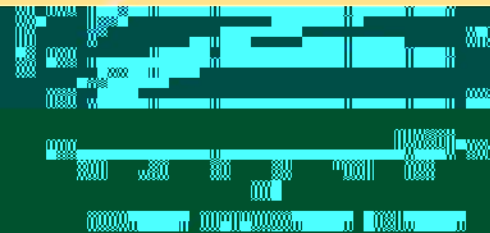

For more information, visit www.logix.com or call 1-800-451-1000. Logix is a registered trademark of Logix Corporation. All other trademarks are the property of their respective owners.



Logix Corporation
10000 Logix Drive
Houston, TX 77036
USA

Logix Corporation
10000 Logix Drive
Houston, TX 77036
USA

Logix Corporation
10000 Logix Drive
Houston, TX 77036
USA

Logix Corporation
10000 Logix Drive
Houston, TX 77036
USA

Logix Corporation
10000 Logix Drive
Houston, TX 77036
USA